



/ Leanlock 42 / 60

Smooth design, sturdy material

/ GENERAL

In contrast to the Francis model, this U-rack has rounded corners for those who prefer a smoother silhouette. Like any other U-rack, this model is sturdy and is suitable for parking two bicycles.



/ DATASHEET

Structure

- Bended tube (Dxd = 42x3mm or 60x3mm)
- 2 base plates (Dxd = 200x5mm)
- Extension for concreting

Material

- Steel

Versions

- D=42mm
- D=60mm
- On base plates
- To concrete

Connecting options

- Yes

Dimensions

Base plates

- LxDxH = 1000x42x800mm
- LxDxH = 1000x60x800mm

Concreting







- LxDxH = 1000x42x (800 + 270) mm
- LxDxH = 1000x60x (800 + 300) mm

Surface treatment

- Hot-dip galvanized steel
- Hot-dip galvanized and powder coated steel

Anchoring

- Concreting
- Base plates
 - Directly on the pavement by means of wedge bolts
 - With screws and plugs on 2 concrete blocks 30x30x40cm
 - By chemical anchoring

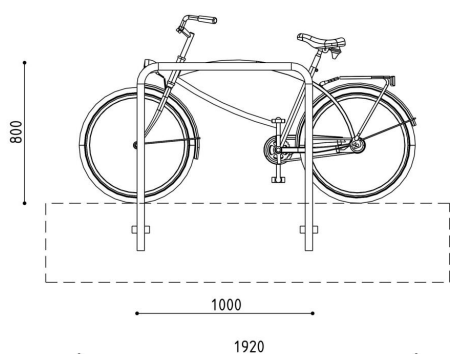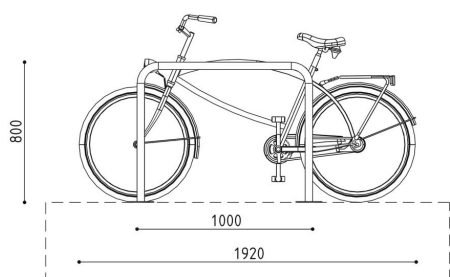

/ INSPIRE



